

Required Tools

measuring
tape



drill with
2mm bit



phillips bit or
screwdriver



pencil



knife



Included Hardware

The hardware can be found in the small plastic bag included with your blind.



Slot Side
Installation Bracket



Pin Side
Installation Bracket



Screws for Wood,
Metal or Wall
Plugs



Wall Plugs for
Brick or Cement
using a 6mm bit

Feedback?

We would love to know how you went with your installation...


Please write a review on our website letting us know your experience with Veneta Blinds

www.venetablinds.com.au

1 Installation Brackets

Installing inside the window frame...

- Take note to position brackets away from window handles and other obstructions allowing the blind to operate freely. Often the bracket will be flush with the front of window frame.
- Slide bracket covers onto brackets, if not already done.
- Position Slot Side bracket inside window frame at the top corner and mark where the 2 screws will go.
- Take note of the measurement from bracket to the front of window frame.
- Position Pin Side bracket inside window frame at the opposite top corner, at the same measurement to the front of window frame and mark where the screws will go.
- We recommend drilling pilot holes for the screws using a 2mm bit.
- Fix the brackets into position using 2 screws for each bracket.

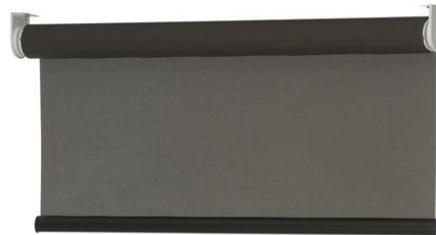

Installing outside the window frame...

- Position the Slot Side bracket at the top corner of where the blind will sit and mark where the 2 screws will go (often edge of architrave).
- Position the Pin Side bracket at the opposite top corner of where the blind will sit and mark where the 2 screws will go.
- We recommend using a spirit level to align brackets if not on architrave.
- We recommend drilling pilot holes for the screws using a 2mm bit.
- Fix the brackets into position using 2 screws for each bracket.

2 Install Blind

- With the blind still rolled up...
- Insert the pin end of the blind into the Pin Side bracket.
- Slide the metal Slot end of blind into the Slot Side bracket.



Need HELP?

Call

Customer Service

1300 836 382

3 Tension Blind

- Using the bottom rail pull the blind half way down and lock into place.
- Unclip the blind from the installation brackets by winding the clear plastic cog (pin side end) until the blind releases from the brackets (if pin locks, unwind cog to release the pin).
- Gently roll the blind all the way back up and re-install the blind into the brackets as per step 2.
- Test the tension and do the same process again to increase or decrease the tension.

Great Job... Enjoy your new Veneta Blinds!

Operating your Blind

- To operate your new Cordless Roller blind, simply pull the blind down using the bottom rail. Ensure the blind locks in position before releasing the bottom rail.
- To raise your Cordless Roller blind, pull the bottom rail down slightly to unlock the mechanism and then support the bottom rail as you raise the blind to the desired position, again allowing it to lock into position. Note: The slower you move the blind the easier it will lock into place.

Maintaining your Blind

1 Dusting

- Dust can be removed using a feather duster or vacuum with brush attachment on low suction.

2 Spot Cleaning

- Use a warm damp cloth or a mild detergent for tougher stains.
- Dab the affected area, but do not rub the fabric. Finish with just a warm damp cloth.
- Allow the fabric to dry in the lowered position.

100% Child Safe

This product has no
cord or chain
and is
100% Child Safe

3 Fabric Rolls off to one side

- If the fabric starts to gather at one side or rolls up unevenly you will need to re-align the fabric.
- To do this, lower the fabric completely down.
- Then as you roll the fabric back up, apply slight tension to the side you want the roll to go.
- Be sure not to let the fabric gather or lump around the tube.
- Repeat this process a few times over.
- If this does not fix the problem, please contact our Customer Service team on 1300 836 382.

4 How to remove blind

- To remove the blind, spin the clear plastic cog at the Pin Side end of the blind.
- The pin will retract allowing you to remove the blind from the brackets.